

KANENZO WOODEN COMPOSITE TECHNICAL SPECIFICATION


PREMIUM DECK 140

Material: Wooden Composite Premium Deck 140 made of High

Density Polyethylene (HDPE) and Wood Sawdust

Product Dimensions: Width: 140mm
 Height 26mm
 Length: 3m-6m

Appearance:

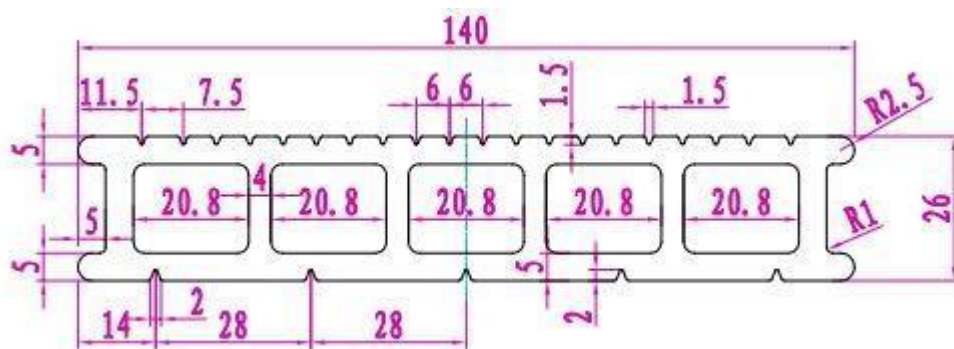

- Wooden Composite Premium Deck 140 product is composed of at least 60% wood sawdust, 30% HDPE (high density polyethylene), 10% binder and additives. ($\pm 5\%$)
- Premium Deck 140 dimensions will be; Width; 140 mm, Height; 26 mm and Length will be variable between 3m and 6m.
- Interior structure will be composed of 5 cells. Cell dimensions will be 21mm ($\pm 5\%$) in width and 16mm ($\pm 5\%$) in height for resistance.
- Upper surface thickness of Premium Deck 140 will be 5,00mm ($\pm 5\%$), and lower surface thickness will be 5,00mm ($\pm 5\%$).
- Main system is composed of 3 parts; Premium Deck 140, Premium Frame, Premium clips.
- Premium L Deck: Used for edge covering of Premium Deck 140 and Frame. It can be used for corner turns and facilitates installation and provides aesthetic appearance.
- Premium Deck 140 has double sided non-slip surface with different patterns on both sides.
- Premium Frame Profile; Width; 45mm, Height; 35mm and Length; 3m.
- Premium L Deck is composed of 6 cells. Two of them are on height and four are on width part. Width; 140 mm, Height; 26 mm, L height 60 mm and Length will be variable between 3m and 6m.
- Our products are resistant to outdoor weather conditions, they do not shred, get mossed or splinter and they are antibacterial.
- Our products can be recycled and do not contain carcinogen plastic and addition materials.